
Funk[™] Series 59000 59000 Four Pump Drive

Industrial Drivetrain Specifications



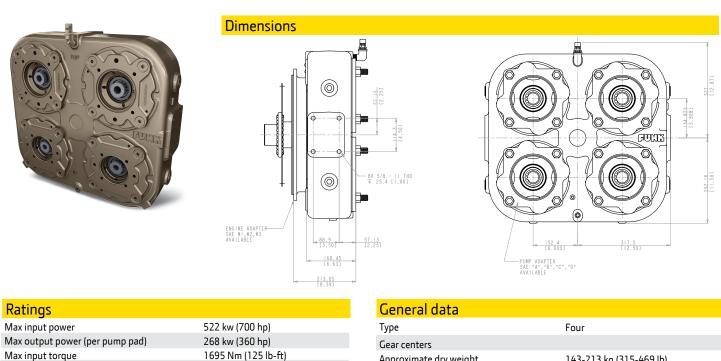

Max output torque	88 I NM
Max input/output speed	3000 rpm
Gear ratios	
59000 double, triple, four	

Gear r	atios					
59000 da	ouble, triple	four				
.721:1	.78:1	.84:1	.898:1	1:1	1.13:1	1.2:1
59000 fo	our (wide)					
.74:1	1:1					

General data	
Туре	Four
Gear centers	
Approximate dry weight	143-213 kg (315-469 lb)
Pump rotation	Anti-enginewise
Flywheel covers	
Nominal clutch size	
Oil capacity	
Oil type	JDM J20C specification MIL-L-2015C or API classification GL-5

Bold italicized text indicates common Series 59000 options.

Features and benefits

Perfect fit

- With more than 5,000 pump drive configurations up to 708 kW (950 hp), we are sure to have the pump drive that meets your needs. Our application engineers provide support to help you choose the best pump drive for your application.

Fast service

- Whether you need a new pump drive or service support on an existing drive, our modular assembly system and experienced regional distribution network lets us get you what you need fast.

High quality

- We use the latest manufacturing technology to ensure we deliver the highest quality products for you.

Integration support

- Getting the most out of your equipment depends on close integration between all components. Our application experts can help integrate your entire system from the engine to the pump drives, powershift transmissions, HMD transmissions, planetary drives, and inboard planetary axles.

Photographs may show non-standard equipment.

Specifications and design subject to change without notice. Ratings may vary depending on application and service. Application and installation are subject to review by John Deere.

John Deere Power Systems 3801 W. Ridgeway Ave. PO Box 5100 Waterloo, IA 50704-5100 Phone: 800.553.6446 Fax: 319.292.5075

Litho in U.S.A. (17-01) © 2017 JOHN DEERE